

# LIEBERT® iTON 400 VA - 2000 VA

Reliable Power Protection for Desktop Workstations



## Liebert® iTON is a reliable line-interactive UPS designed for the protection of desktop computers and standalone IT equipment

Liebert iTON comes complete with an automatic voltage regulator (AVR) allowing flexibility and reliability for PCs and other sensitive electronic equipment. With its compact design and easy to use controls, Liebert iTON also provides sufficient back up time, allowing work in progress to be saved safely before proceeding with the system shutdown. Liebert iTON also comes complete with automatic restart and cold start functions for increased continuity and availability.

### Features

- Automatic voltage regulator (AVR)
- Compact size
- Light weight
- Easy operation.

### Higher Availability

- Overload protection and alarm
- Auto re-start with AC recovery
- Fast charging
- Cold start function.

### Flexibility

- Available in ratings from 400 VA up to 2000 VA
- USB port (for 1000 VA, 1500 VA, 2000 VA)
- Schuko sockets (for 400 VA, 600 VA, 800 VA)
- Schuko and IEC sockets (for 1000 VA, 1500 VA, 2000 VA).

### Ideally Suited for:

- Desktop PCs
- Professional workstations
- Small routers, bridges and hubs
- Point-of-sale terminals
- PBXs
- Other sensitive electronics.



Liebert iTON 600 VA

Liebert iTON 1000 VA

Liebert iTON 2000 VA


## Liebert® iTON 400 VA Specifications

MODEL NUMBER	Liebert iTON 400 VA	Liebert iTON 600 VA	Liebert iTON 800 VA
Power Rating	400 VA / 240 W	600 VA / 360 W	800 VA / 480 W
<b>DIMENSIONS, W X D X H - MM</b>			
Unit	101 x 279 x 142		
Shipping	143 x 327x 220		
<b>WEIGHT - KG</b>			
Unit	3.6	4.2	4.9
Shipping	3.9	4.7	5.4
<b>INPUT AC PARAMETERS</b>			
Line Input Nominal Voltage	220 - 240 V AC		
Line Frequency	50 / 60 Hz; Auto Sensing		
Input Socket	Schuko cord		
Output Sockets	(2) Schuko		
Output Voltage	230 V AC		
Waveform (Battery Operation)	Stepped sinewave		
<b>BATTERY PARAMETERS</b>			
Type	Valve-regulated, non-spillable, lead acid		
Quantity x Voltage x Rating	1 x 12V x 4.5 Ahr	1 x 12V x 7 Ahr	1 x 12V x 9 Ahr
Recharge Time	4 hours recovers to 90% capacity (Typical)		
<b>ENVIRONMENTAL</b>			
Operating Temperature	0°C to 40°C		
Relative Humidity	0% to 90% non condensing		
Operating Altitude	<1500 m without derating		
Standards and Certifications			
Safety	EN62040-1:2008		
EMC	EN62040-2:2006 class C2		
Compliance	CE		



Liebert® iTON 400 VA  
Liebert iTON 600 VA  
Liebert iTON 800 VA

MODEL NUMBER	Liebert iTON 1000 VA	Liebert iTON 1500 VA	Liebert iTON 2000 VA
Power Rating	1000 VA / 600 W	1500 VA / 900 W	2000 VA / 1200 W
Dimensions, W x D x H - mm			
Unit	146 x 341 x 164	146 x 391x 205	
Shipping	200 x 447 x 264	235 x 495 x 297	
<b>WEIGHT - KG</b>			
Unit	8.0	11.1	11.5
Shipping	9.0	12.1	12.5
<b>INPUT AC PARAMETERS</b>			
Line Input Nominal Voltage	220 - 240 V AC		
Line Frequency	50 / 60 Hz; Auto Sensing		
Input Socket	Schuko cord	IEC 320-C14	
Output Socket	(2) Schuko + (2) IEC 320-C13	(3) Schuko + (3) IEC 320-C13	
Output Voltage	230 V AC		
Waveform (Battery Operation)	Stepped sinewave		
<b>BATTERY PARAMETERS</b>			
Type	Valve-regulated, non-spillable, lead acid		
Quantity x Voltage x Rating	2 x 12V x 7 Ahr	2 x 12V x 9 Ahr	
Recharge Time	4-6 hours recovers to 90% capacity (Typical)		
<b>ENVIRONMENTAL</b>			
Operating Temperature	0°C to 40°C		
Relative Humidity	0% to 90% non condensing		
Operating Altitude	<1500 m without derating		
<b>STANDARDS AND CERTIFICATIONS</b>			
Safety	EN62040-1:2008		
EMC	EN62040-2:2006 class C2		
Compliance	CE		

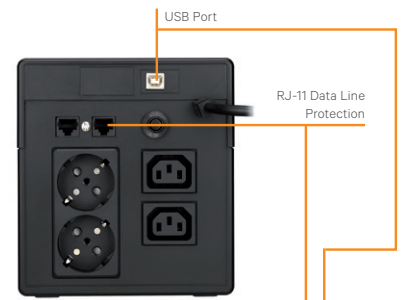

Liebert iTON 1000 VA



Liebert iTON 1500 VA  
Liebert iTON 2000 VA

Note: External battery cabinets are not permitted. Internal batteries only.

### Tech Support

Always On! Our Commitment to your daily Business, provided by multi language Tech Support.

Toll-free 0080011554499

Toll +39 02 98250222

eoc@VertivCo.com